


## Mosaic™ Cable outlet

Cat. No(s): 2 775 50L




### 1. USE

Cable outlet for cables of different diameters.  
Flush mounted.

### 2. RANGE

Description	White
Cable outlet with cable clamps max. Ø to be used 12 mm, min. Ø to be used 4 mm 2 modules	2 775 50L

### 3. DIMENSIONS (mm)

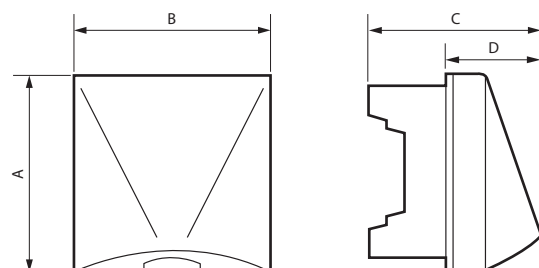

A	B	C	D
45	45	39	20

### 4. TECHNICAL CHARACTERISTICS

#### ■ 4.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 41  
Protection against impact: IK 04

#### ■ 4.2 Material characteristics

Base: PC  
Cover plate: ABS White RAL 9003  
Halogen-free  
UV-resistant  
Self-extinguishing: 650°C/30 s

#### ■ 4.4 Climatic characteristics

Storage temperature: - 10°C to + 70°C  
Use temperature: - 5°C to + 35°C

### 5. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Resistance to the cleaning products: Hexane (NF C 61-314), Methylated spirit, Soapy water, Diluted ammonia, Pure bleach diluted to 10%, Window-cleaning substances, Pre-impregnated wipes.  
Anios, Surfanios, Bactilysine, Diluted hydrogen peroxide (35 %).

**Caution:** Always test before using other special cleaning products.

### 6. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.  
See e.catalogue.