



Mosaic™ Cover plates

Cat. No(s): 2 778 02L/04L/06L/14L/16L/22L



2 778 02L



2 778 04L


1. USE

Plates for covering mechanisms with 2 to 3 x 2 modules.

2. RANGE

| Description | White |
|----------------------------|-----------|
| 2 modules | 2 778 02L |
| 4 modules - Horizontal | 2 778 14L |
| 6 modules - Horizontal | 2 778 16L |
| 2 x 2 modules - Horizontal | 2 778 04L |
| 2 x 2 modules - Vertical | 2 778 22L |
| 3 x 2 modules - Horizontal | 2 778 06L |

3. DIMENSIONS (mm)

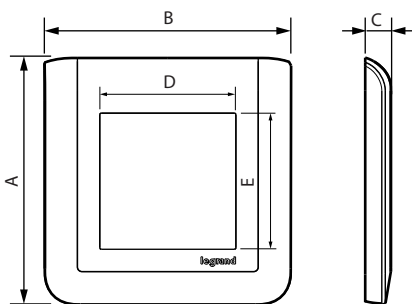

| Cat. Nos | A | B | C | D | E |
|-----------|-----|-----|-----|------|------|
| 2 778 02L | 82 | 82 | 8.5 | 45.5 | 45.5 |
| 2 778 14L | 82 | 153 | 8.5 | 91 | 45.5 |
| 2 778 16L | 82 | 224 | 8.5 | 136 | 45.5 |
| 2 778 04L | 82 | 153 | 8.5 | 45.5 | 45.5 |
| 2 778 06L | 82 | 224 | 8.5 | 45.5 | 45.5 |
| 2 778 22L | 153 | 82 | 8.5 | 45.5 | 45.5 |

4. TECHNICAL CHARACTERISTICS

■ 4.1 Mechanical characteristics

Impact test: IK 04

■ 4.2 Material characteristics

Halogen free

UV resistant

Material of plates: ABS White (RAL 9003) polyglass appearance

Material of subplates: PC

Self-extinguishing: 650°C/30 s

■ 4.3 Climatic characteristics

Storage temperature: - 10°C to + 70°C

Use temperature: - 5°C to + 35°C

5. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Caution: Always test before using other special cleaning products

6. SPECIAL USE

Mosaic plates must not be painted.