


2 780 01L



2 780 11L


1. USE

Two-way switches.
 A mechanism allows you to create an LED or standard function.
 Flush or surface-mounting.
 To be fitted with finishing plates.

2. RANGE

Description	White
Mosaic Easy-Led two-way switch - 1 module Its mechanism allows you to create an LED or standard function. Can become illuminated with plug-in indicator Cat. No. 0 676 86L (230 V) or Cat. No. 0 676 87L (12, 24, 48 V) Can become indicator with plug-in indicator Cat. No. 0 676 85L (230 V) or Cat. No. 0 676 89L (12, 24, 48 V)	2 780 01L
Mosaic Easy-Led two-way switch - 2 modules Its mechanism allows you to create an LED or standard function. Can become illuminated with plug-in indicator Cat. No. 0 676 86L (230 V) or Cat. No. 0 676 87L (12, 24, 48 V) Can become indicator with plug-in indicator Cat. No. 0 676 85L (230 V) or Cat. No. 0 676 89L (12, 24, 48 V)	2 780 11L

3. DIMENSIONS (mm)

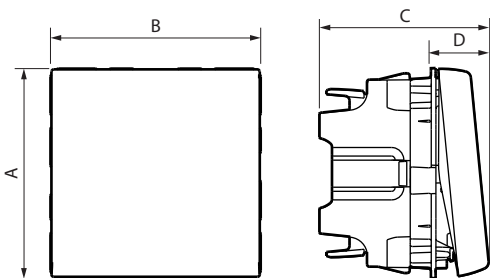

Cat. Nos.	A	B	C	D
2 780 01L	45	22.5	36.5	12.5
2 780 11L	45	45	36.5	12.5

4. CONNECTION

Automatic terminals
 Terminal capacity: 2 x 2.5 mm²
 Stripping length: 12 mm

5. TECHNICAL CHARACTERISTICS

■ **5.1 Mechanical characteristics**

Impact tests: IK 04
 Penetration by solid/liquid matter: IP 31 D

■ **5.2 Material characteristics**

Mechanism casing: PC
 Rocker plates: White RAL 9003 ABS + opalescent white PC
 Halogen-free
 UV-resistant

Self-extinguishing:

850°C/30 s for insulating components holding live parts in place.
 650°C/30 s for other insulating components.

■ **5.3 Electrical characteristics**

Voltage: 250 V~
 Current: 10 AX - Max. power for self-ballasted lamps: 100 W

■ **5.4 Climate characteristics**

Storage temperature: -10°C to +70°C
 Usage temperature: -5°C to +35°C

6. CARE

Clean the surface with a cloth.
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.
 Resistant to the following products: Hexane (EN60669-1), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

Caution: Always test before using other special cleaning products.

7. ACCESSORIES

Easy-Led plug-in indicators with white LEDs.

Illuminated lights

0 676 86L	230 V~ - 0.041 W
0 676 87L	12/24/48 V~ - 0.006 W/0.033 W/0.153 W

Indicator lights

0 676 85L	230 V~ - 0.39 W
0 676 89L	12/24/48 V~ - 0.006 W/0.033 W/0.153 W

Clip onto the front of the mechanism by removing the rocker plate.

8. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.
See e-catalogue.