


Forix™ - IP 2X Push-buttons

Cat. No(s): 7 824 05/35




1. USE

General lighting control mechanisms become illuminated with lamp (Cat. No. 7 824 57).

2. RANGE


Finishes		Designation
White	Ivory	
7 824 05	7 824 35	One gang push-button

3. OVERALL DIMENSIONS

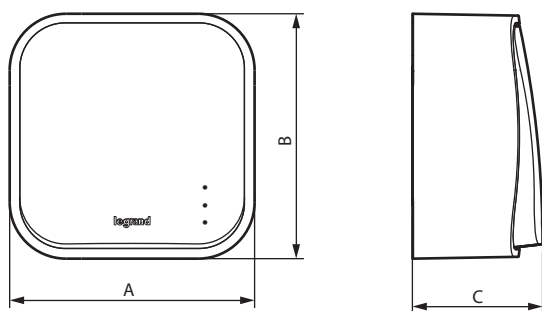


Cat. No.	A	B	C
7 824 05/35	65	65	34.5

Base:

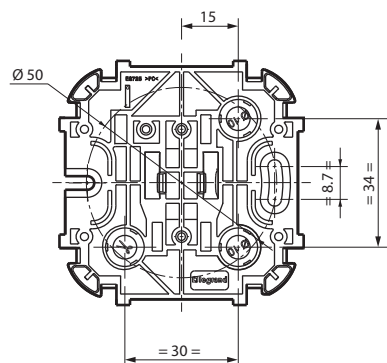

4. CONNECTION

Information for pre-cut:

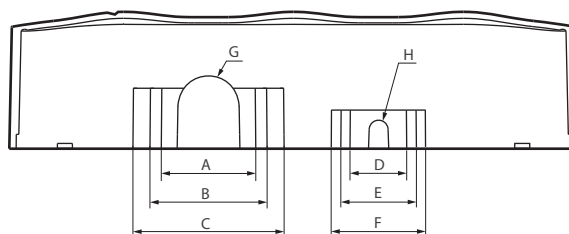

Cat. No.	Pre-cut sides (mm)			
	A 25 x 16	B 31 x 16	C 40 x 16	D 15 x 10
7 824 05/35	-	-	-	2
	E 20 x 10	F 25 x 10	G Ø 16	H Ø 5
	2	2	2	2

Stripping: 10 mm
Terminal type: with screws
Terminal capacity up to: 2 x 2.5 mm²
Recommended screwdriver size: pozidrive No 2
Recommended tightening torque: 0.5 Nm

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Protection against liquids: IP 21
Impact tests: IK 04

■ 5.2 Material characteristics

Base: PC
Cover: PP
Rocker: ABS
Mechanism: PC

■ 5.3 Electrical characteristics

Voltage: 250 VAC
Current: 6 A

■ 5.4 Climatic characteristics

Storage and use temperature: - 25° C to + 60° C

6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Resistance to the following agents: Hexane (EN 60669-1), Methylated spirits, Soapy water, Diluted ammonia, Diluted pure bleached 10%, Glass cleaning substance, Pre-impregnated wipes.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. ACCESSORIES

Lamp

Become illuminated with lamp Cat. No 7 824 57