


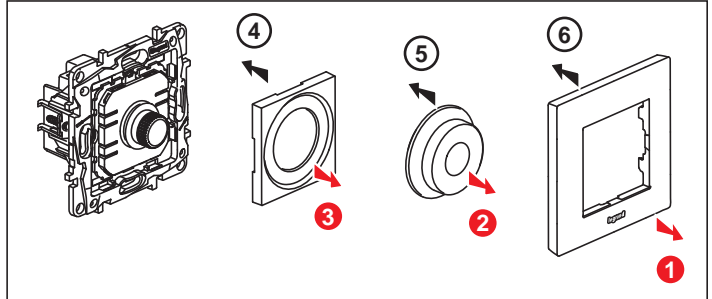
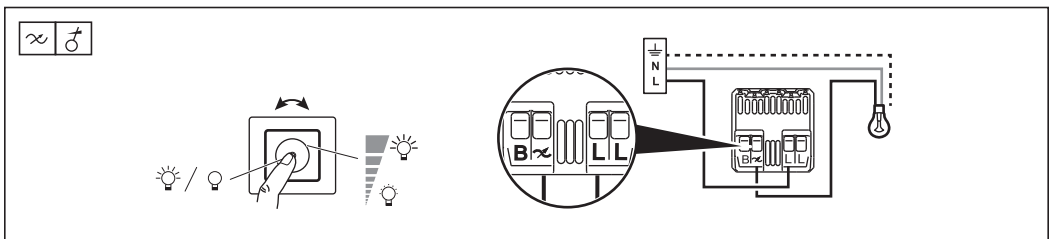
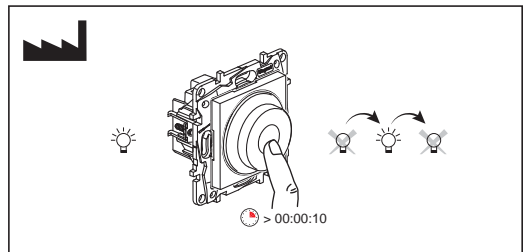



			U	
-10°C ... +70°C	0°C ... +40°C	40 mm	100 .. 240 V- 50 / 60 Hz	8 mm 1...2,5 mm ²

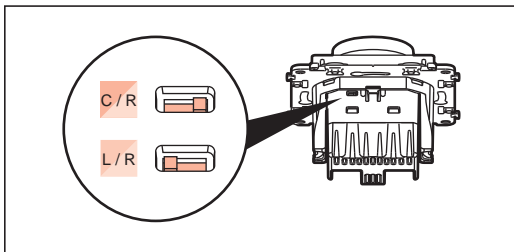

	R		L		C/L		Dimmable	Dimmable LED
200-240V- 50/60Hz	5...300 W		5... 300 VA	5... 300 VA	5... 300 VA	5... 300 VA	5...75 W ≤ 10 x	
100-200V- 50/60Hz	5...150 W		5... 150 VA	5... 150 VA	5... 150 VA	5... 150 VA	5...37 W ≤ 10 x	

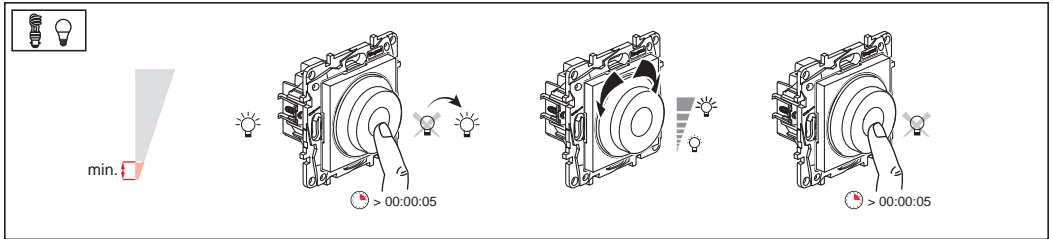

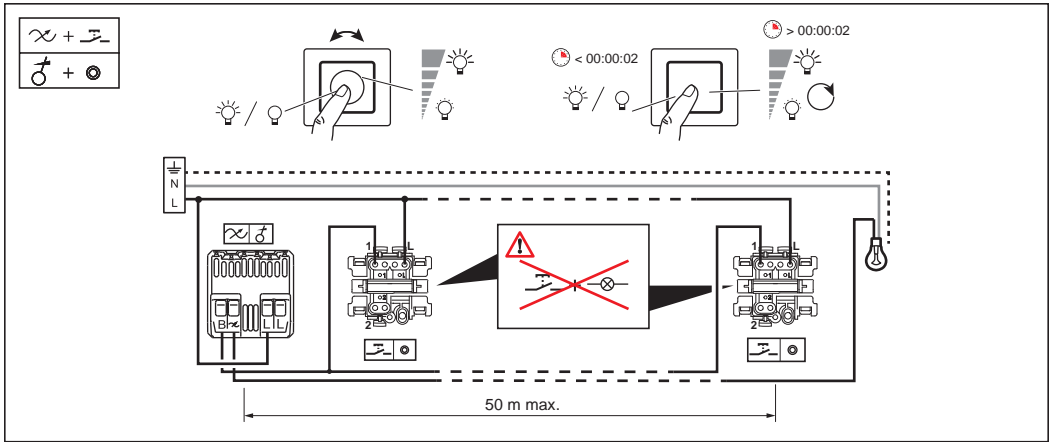



8 640 10

	100 - 240 V~
	50 / 60 Hz
	8 mm / 2 x 2,5 mm ²
	-10°C .. +70°C
	-5°C .. +35°C
	PIR
	5 ... 1275 lux
	00:00:10 ... 00:10:00
	8 m
	120°

110 V~	3 W ... 125 W	3 VA ... 125 VA	3 VA ... 125 VA	3 VA ... 125 VA	3 VA ... 125 VA	3 VA ... 125 VA	3 VA ... 125 VA	3 VA ... 125 VA	3 W ... 50 W
230 V~	3 W ... 250 W	3 VA ... 250 VA	3 VA ... 250 VA	3 VA ... 250 VA	3 VA ... 250 VA	3 VA ... 250 VA	3 VA ... 250 VA	3 VA ... 250 VA	3 W ... 100 W
	1 A	1 A	1 A	1 A	1 A	1 A	1 A	1 A	0,4 A
									3 W ... 50 W
									3 W ... 100 W
									0,4 A

