


LUMINARIAS LED Y SISTEMAS DE ILUMINACIÓN
LED LIGHTING SYSTEM

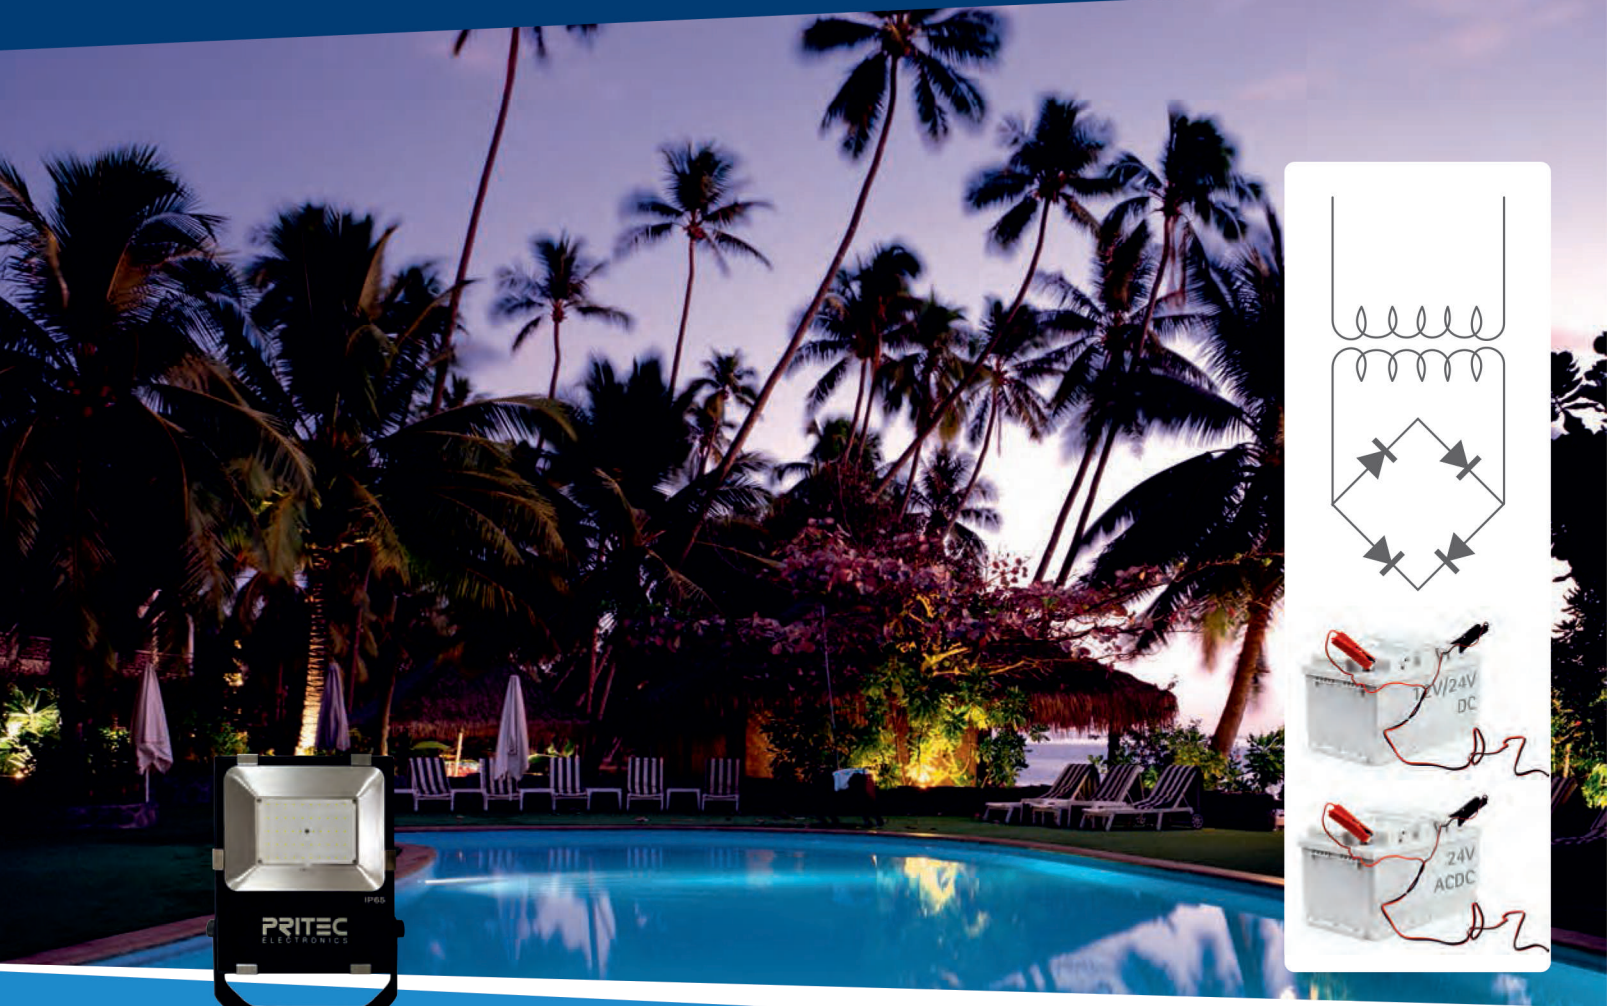


PROYECTOR
LED
20W-30W
50W-80W
100W-200W
12V-24V DC
& 24V ACDC

MBT.

La amplia gama de proyectores a muy baja tensión aporta grandes soluciones para iluminación en entornos donde es necesaria una tensión muy baja para garantizar la seguridad. El modelo 12-24 permite un amplio rango de tensión de entrada, siempre en corriente continua mientras que el modelo 24 ACDC permite la entrada tanto en alterna como en continua a 24V.

VLV.

The wide range of very low voltage flood lights provides great solutions for lighting in environments where a very low voltage is necessary to guarantee safety. The 12-24 model allows a wide range of input voltage, always in direct current meanwhile 24V ACDC allows to use 24V altern and direct current power supply.

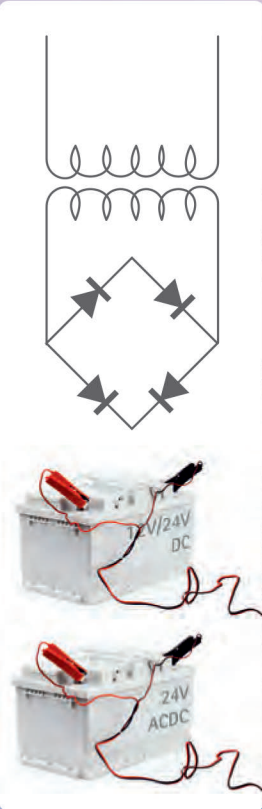

PROYECTOR LED
12V-24V DC & 24V ACDC



Proyectores
LED

Modelo Model	PFL20124 (*) PFL2024ACDC	PFL30124 (*) PFL3024ACDC	PFL50124 (*) PFL5024ACDC	PFL80124 (*) PFL8024ACDC	PFL99124 (*) PFL9924ACDC	PFL200124 (*) PFL20024ACDC
Tecnología del LED LED technology	SMD	SMD	SMD	SMD	SMD	SMD
Tensión entrada nominal Input voltage	12V/24V (*) 24V	12V/24V (*) 24V	12V/24V (*) 24V	12V/24V (*) 24V	12V/24V (*) 24V	12V/24V (*) 24V
Frecuencia entrada nominal Input frequency	DC (*) AC/DC	DC (*) AC/DC	DC (*) AC/DC	DC (*) AC/DC	DC (*) AC/DC	DC (*) AC/DC
Luminosidad nominal lámpara Lumen	1800Lm	2700Lm	4500Lm	7200Lm	8700Lm	16800Lm
Temperatura de color Color temperature	6000K	6000K	6000K	6000K	6000K	6000K
Potencia del chip Chip power	20W	30W	50W	80W	100W	200W
Ángulo Angle	160°	160°	160°	160°	160°	160°
Dimensiones Size	180x150x50mm	226x188x50mm	263x219x52mm	299x280x55mm	342x330x63mm	400x400x66mm
Material carcasa Housing material	Aluminio / Aluminium					
Material protección LED LED protection material	Vidrio / Glass					
CRI	>80					




Contacte con nosotros para otras temperaturas de color: 2900K o 4500K.



PFL20124
PFL2024ACDC



PFL30124
PFL3024ACDC

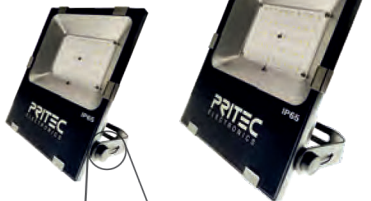


PFL50124
PFL5024ACDC





PFL80124
PFL8024ACDC




PFL100124
PFL9924ACDC



PFL200124
PFL200624ACDC

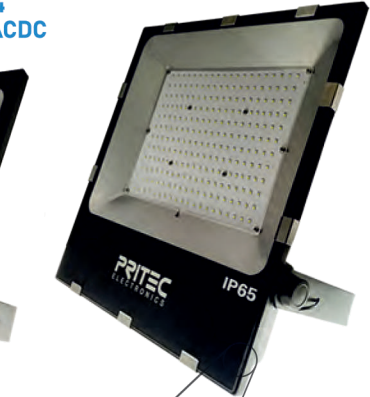

Lira reforzada
Gran robustez
3mm grosor
Giro 300°



Válvula de
compensación
de presión



Vídeos demostrativos:
www.pritec.com/videos

