

**General Data**

Article No.	RFXA0617
Code	RL-FX 900 37W/865/5M
Product EAN	4003556005631
Customs tariff no.	94054039
Box quantity (pcs.)	44
EAN Box	4003556405639
Gross weight of box in kg	5.66
Length of box in m	0.53
Width of box in m	0.23
Height of box in m	0.26
ETIM class	EC002706
ETIM class name	Light ribbon-/hose/-strip
Weight	0,1 g
Product status	Active

**Electric Parameters**


Nominal power	37 W
Watt per metre	7,4 W/m
Energy Consumption kWh/1000h	41 kWh/1000h
Nominal voltage	24 V
Lamp voltage	24-24 V
Voltage type	DC
Inverse voltage	25 V
Nominal current (A)	1,54 A
Number of poles	2

**Light Application Parameters**

Lumens per metre	880 lm/m
Beam angle	120 °
Luminous efficiency	119 lm/W
Colour of light	White
Colour temperature	6500 K
Colour rendering index Ra	> 80
Colour Stability	≤ 4 sdcn

**Service Life**

Lifetime L70B50	20000 h
Guarantee up to	3 years

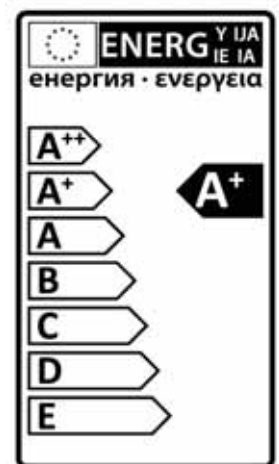

## Specification

Length	5000 mm
Width	8,2 mm
No. of LEDs per meter	60
Distance of LEDs (Pitch)	16,67 mm
Shortest cuttable unit (SEU)	100 mm
Lowest bending radius	25 mm
Cable Length	300 mm
Model	Tape
Self-adhesive	Yes

## Notes on Operation

Degree of protection (IP)	IP20
max. operable length	5 m
Connection type	Solder
Length of feed-in cable	300 mm
Type of connection	Connector cable soldered on both ends
Permissible storage temperature	-30-+85 °C
Ambient temperatures	-20...+40 °C
Tc Temperature max.	65 °C
Mounting method	Built-in
Type of control gear	LED operating device voltage-controlled

## Notes

Flexible linear LED module with 880lm/m, sticky back for mounting, for operation electronic driver + cooling required, length adjustable.

Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage. The field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

## Notes

### Special features



### General notes

Observe safety instructions during assembly! Please, consider also: The LED module itself and all its components must not be stressed mechanically. The assembly must not damage or destroy conductor tracks on the circuit board. To avoid mechanical damage, the LED modules should be securely fastened to the intended ground. Pay attention to the correct polarity! A wrong polarity will not enable any light emission and may damage the LED module. Parallel connection is urgently recommended as a safe electrical operating mode. Series connection is not recommended. When mounting on metallic or other conductive surfaces, electrical insulation must be provided at the solder joints between the module and the mounting surface. Please make sure that the LED driver has sufficient power to operate the total load. It is the responsibility of the user to provide suitable protection against corrosive substances such as moisture and condensation as well as other harmful elements. For applications exposed to moisture and dust, the module must be protected by a device or housing with a suitable protection class. Radium does offer pre-assembly services. With our Strip Configurator, you can cut the strips to your desired length and combine them with matching aluminum profiles or have them glued directly in, as well as choose a suitable operating device for your application. Our team will be pleased to advise you.

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

### Safety instructions

The LED module does not provide protection against short circuits, overloads or overheating. In order to operate LED modules safely, it is necessary to operate them with a LED driver that protects against short circuits, overloads and overheating. To simplify the luminaire / installation approval, LED drivers and LED modules must bear the CE mark. The installation of LED modules (with LED driver) must be carried out in compliance with all applicable electrical and safety standards. Only qualified personnel may perform installations.

### All technical data without guarantee.