

General Data

Article No.	43018022
Code	RL-DUO26 840/G24D EM
Product EAN	4008597180224
Customs tariff no.	85395000
Box quantity (pcs.)	10
EAN Box	4008597480225
Gross weight of box in kg	1.048
Length of box in m	0.21
Width of box in m	0.09
Height of box in m	0.2
ETIM class	EC001959
ETIM class name	LED-lamp/Multi-LED
Product status	Active

Electric Parameters


Nominal power	10 W
Rated wattage	10.0 W
Weighted energy consumption in 1,000 hours	10 kWh
Power factor	> 0,9
Nominal voltage	220-240 V
Voltage type	AC
Nominal current (mA)	43 mA
max. no. of Lps with 16A (B) circuit breaker with ballast (ECG, CCG no capacitor) / at mains	220
max. no. of Lps with 10A (B) circuit breaker with ballast (ECG, CCG no capacitor) / at mains	135
dimnable	No

Light Application Parameters

Rated lamp luminous flux	1000 lm
Beam angle	120 °
Luminous efficiency	100 lm/W
Colour temperature	4000 K
Colour rendering index Ra	≥ 80
Colour Stability	≤ 6 sdc _m

Service Life

Mean service life	30000 h
Average nominal lifespan	30000 h
No. switching cycles	100000
Lamp survival factor at 6000h	≥ 0.90
Early failure rate at 1000h	≤ 5.0 %

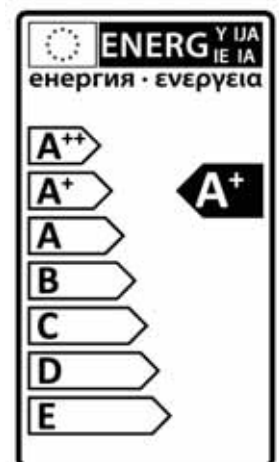

Specification

Energylabel from 2013	A+
Diameter max.	34 mm
Diameter	34 mm
Length max.	171 mm
Length	170,5 mm
Burning position	beliebig
Mercury content	0.0 mg
Lamp shape	Tube, single-ended
Finish	frosted
Base	G24d-3
Material	Plastic
Colour	White

Notes on Operation

Degree of protection (IP)	IP20
Range of storage temperature	-20...+80 °C
Ambient temperatures	-20...+40 °C
Tc Temperature max.	40 °C
Ambient temperature range operation	-20...+40 °C


Notes

LED compact lamp for exchange with Ralux Duo, neutral white light, plastic body, non-dim, base G24d.

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage. The field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Notes

Base



G24d
IEC/EN 60061-1
sheet 7004-78-5


Spectrum

As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

The colour of coloured LEDs depends on the chemical elements within the light generating chip. The coloured light is generated directly and does not need filtering.

White LEDs are either RGB (red + green + blue chip in one LED = light colour white) or blue LED-chips with yellow/orange phosphor in the resin.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

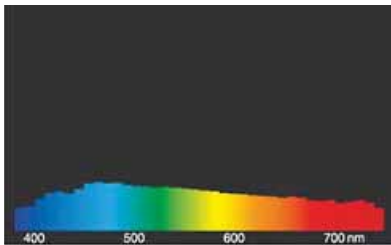

daylight(D 65)

Special features



General notes

When replacing Ralux Duo with LED-lamps, we recommend a simple and uncomplicated replacement (1: 1) at the respective light point without rewiring. Operation at mains voltage directly would also be possible. RL-DUO lamps are not suitable for tandem operation. 35 ° C ambient temperature for the lamp inside the luminaire must not be exceeded. Outdoor use is only permitted with suitable luminaires (IP protection).

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

Safety instructions

To ensure full light efficiency and product life, the permissible temperature ranges must be observed and dry environment ensured. When operated with existing control gear, their compatibility with the lamp must be checked.

LED EssenceDuo - Retrofit f. Ralux Duo, RL DUO26
10W/230/840/G24D

Radium

All technical data without guarantee.