



# eLED VECTRA-22 6MM

Flexible LED strip for indoor lighting. IP20  
Tira LED flexible para uso interior. IP20

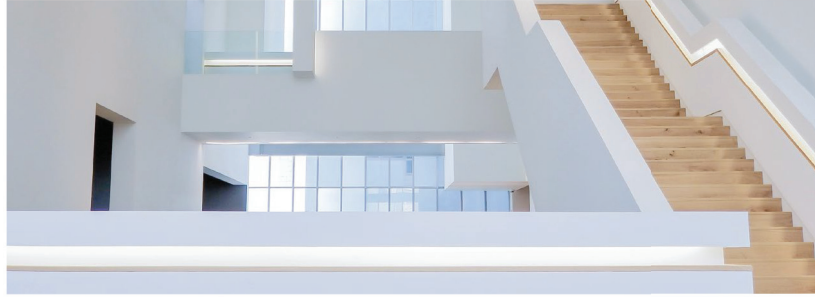

## Colour temp. / Tª color

| 2700 K                      | 3000 K                      | 4200 K                         |
|-----------------------------|-----------------------------|--------------------------------|
| Warm white<br>Blanco cálido | Warm white<br>Blanco cálido | Neutral white<br>Blanco neutro |

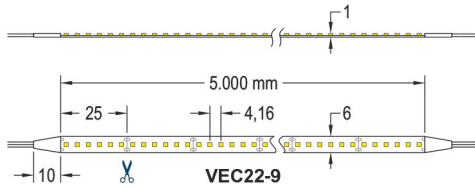

Protection IP20.

Fast and Easy to stick with 3M adhesive back.

Working Temperature Range: -20°C to 40°C.

Wire length: 200 mm.

CRI>90.

Wide 6 mm.

Packaging and weight on  
[www.elt.es/productos/packaging\\_EL.T.pdf](http://www.elt.es/productos/packaging_EL.T.pdf)  
Instructions manual on  
[www.elt.es/productos/inst\\_manual.html](http://www.elt.es/productos/inst_manual.html)

Protección IP20.

Equipado con cinta adhesiva 3M para una fácil y rápida instalación.

Rango de temperaturas de funcionamiento: -20°C a 40°C.

Longitud de los cables: 200 mm.

CRI>90.

Ancho 6 mm.

Embalaje y peso en  
[www.elt.es/productos/embalaje\\_EL.T.pdf](http://www.elt.es/productos/embalaje_EL.T.pdf)  
Manual de instrucciones:  
[www.elt.es/productos/manual\\_irstrucciones.html](http://www.elt.es/productos/manual_irstrucciones.html)

## Technical characteristics / Características técnicas

|                       | Ref. No. | Colour<br>Color | DC Voltage | Colour temp. | LED units     | IP | Power meter        | Luminous efficacy meter   | Luminous efficacy watt    | CRI | Wide  | ✂  | Meters per reel |    |
|-----------------------|----------|-----------------|------------|--------------|---------------|----|--------------------|---------------------------|---------------------------|-----|-------|----|-----------------|----|
|                       |          |                 | Tensión DC | Tª. color    | Ud. LED metro |    | Potencia por metro | Eficiencia luminosa metro | Eficiencia luminosa vatio |     | Ancho |    |                 | mm |
|                       |          |                 | V          | K            |               |    | W/m                | lm/m*                     | lm/W                      |     | mm    | mm | pcs.            | m  |
| eLED VEC 22-9-927-24V | 9955128  | ☐               | 24         | 2700         | 240           | 20 | 9                  | 710                       | 79                        | >90 | 6     | 25 | 6               | 5  |
| eLED VEC 22-9-930-24V | 9955129  | ☐               | 24         | 3000         | 240           | 20 | 9                  | 740                       | 82                        | >90 | 6     | 25 | 6               | 5  |
| eLED VEC 22-9-942-24V | 9955130  | ☐               | 24         | 4200         | 240           | 20 | 9                  | 820                       | 91                        | >90 | 6     | 25 | 6               | 5  |

Values tested on 1 m. LED strips / Valores testados en tiras LED de 1 m.

\* Tolerance range for power and lm/m: ±10% / Rango de tolerancia potencia y lm/m: ±10%

## Accessories / Accesorios



Advised to mount on an aluminium profile  
Recomendado instalación con perfil disipador de aluminio



Logistical data  
Datos logísticos  
P. 123

