

VES 100mm Range


- Suited for bathrooms and toilets
- Easy to install
- Quiet and efficient
- Extract rate of 85m³/hr, 23 litres per second
- ABS thermoplastics for strength, durability, aesthetics and easy cleaning
- Single phase induction motor with pre-oiled bearings for a long, maintenance free life
- Pullcord, timer and humidistat version available
- Complies with the Building Regulations on Ventilation (F1)



Slimline Bathroom Fan

The VES range offers performance of 23l/s whilst being slimline and blends in when surfaced mounted to offer an unobtrusive finish.

Electrical

220-240V AC 50Hz . Single Phase consuming 14 Watts. The fan is double insulated and does not require an earth. All wiring must comply with current IEE regulations. A double pole isolating switch, have a contact separation of at least 3mm in all poles must be used with a 3amp fuse fitted.

Additional Data

Maximum pressure: 20 Pa
 Fan Speed: 2400 rpm
 Sound: 41dB(A)
 Maximum operating temperature: 40°C

Models

VES100S

Standard Extractor Fan.

VES100P

As above supplied with Pullcord switch.

VES100T

Timer model incorporating integral adjustable electronic timer (1-20mins).


VES100H

Humidity control which is adjustable between 40% RH and 95% RH. Complete with integral adjustable timer (1-20mins).

VES100HP

As above with pullcord override switch. Requires no switched live.

Dimensions (mm)

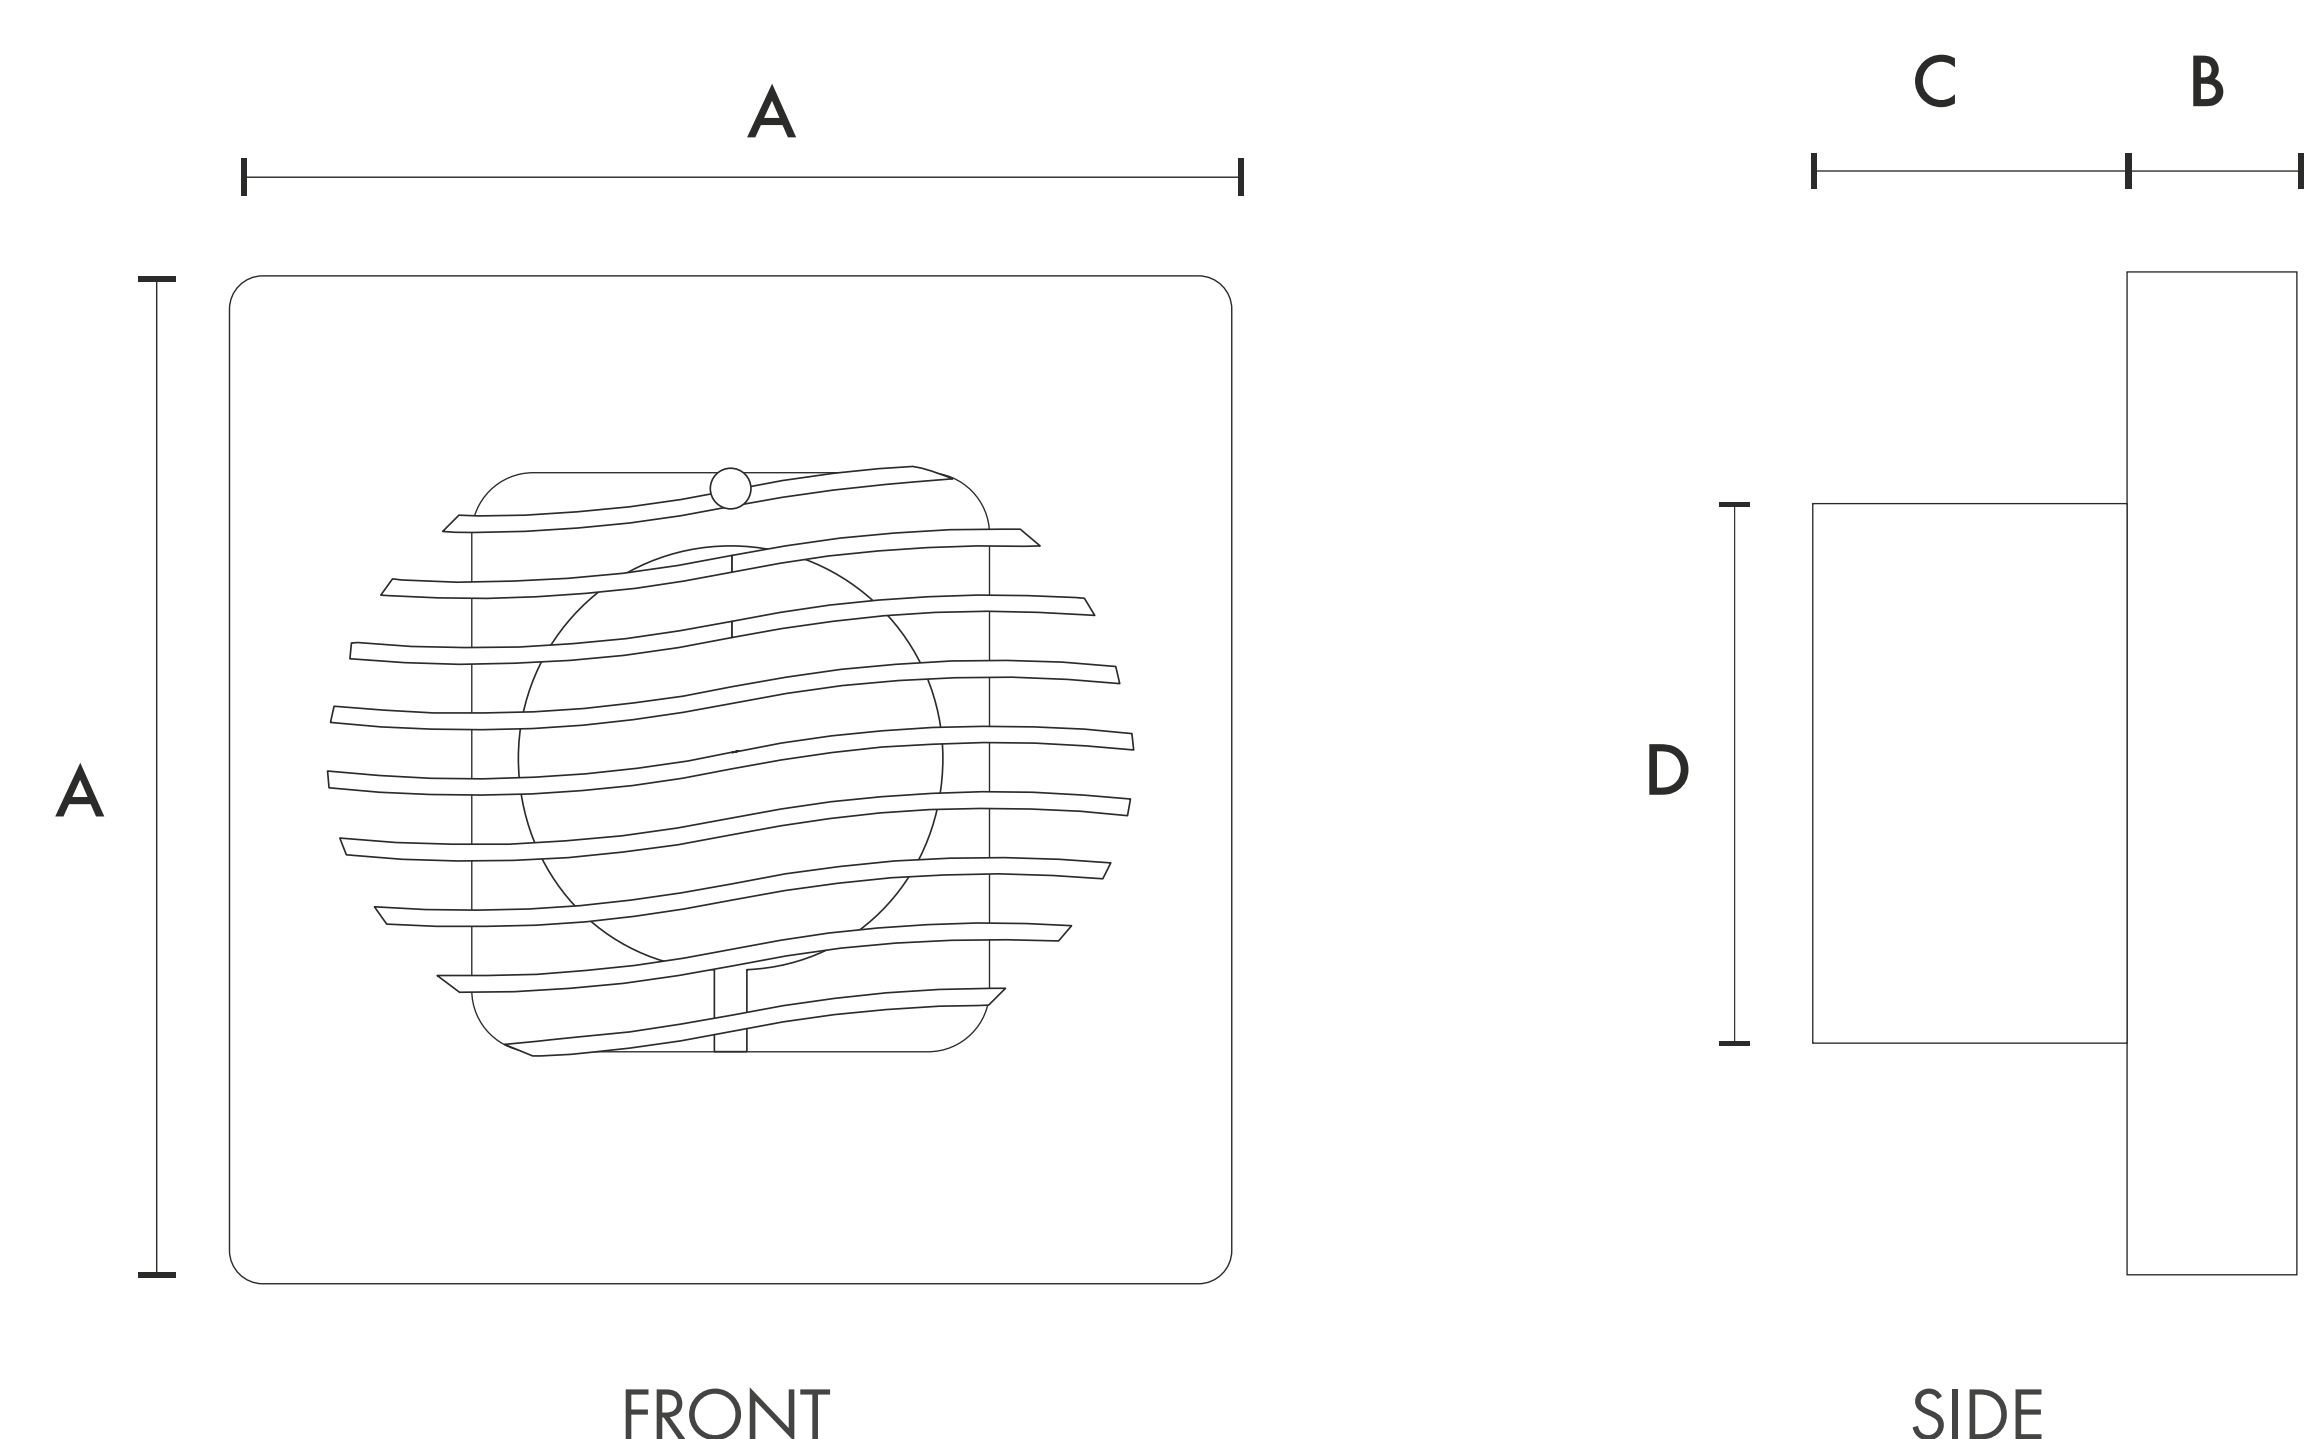

A	B	C	DØ
155	27	50	99